


TechPure
Anti-Microbial Flexible Ducting

Choose Blue.... Breathe Easy



**FORMALDEHYDE
FREE**

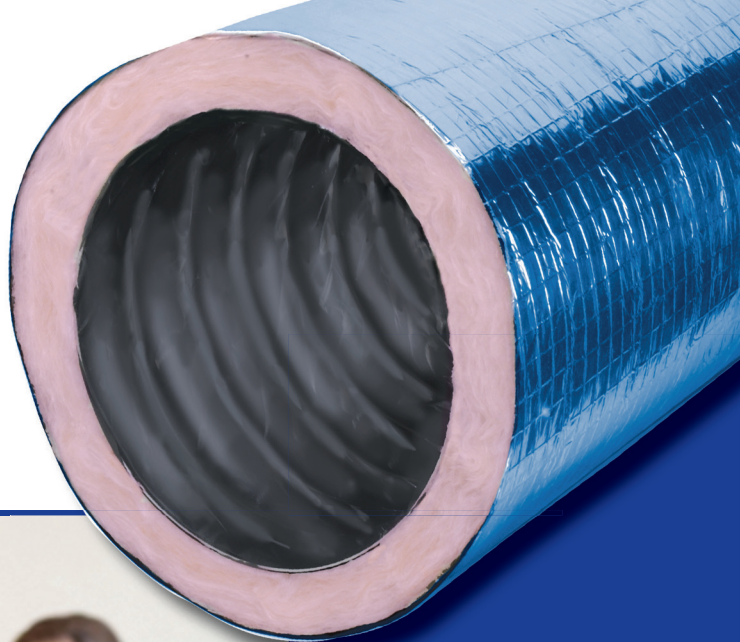

Help prevent mold and the possibility of other indoor contaminants from growing on the inside of your HVAC duct system. Peace of mind is achievable with TechPure® anti-microbial blue duct.

Indoor air pollution caused by mold, moisture and other bacteria in your heating and cooling system can lead to illness as well as breathing problems, like asthma.

TechPure is an anti-microbial duct that resists mold, bacteria and other contaminants, even in adverse environmental conditions. It is *Children and Schools* certified, so you know it is family safe.

You have choices with your system. Choose the best available for peace of mind and breathing. Choose TechPure and....

Choose Blue!




Learn more with your smartphone.
Scan the QR code with your phone
for fast access to more information.



Pure Technology. Breathe Easy.

TechPure has been tested by the GreenGuard Environmental Institute to ASTM D 6329 standard's and analyzed with a quantitative scale. TechPure's insulation is GreenGuard certified and listed for microbial resistance. The acoustically rated chlorinated polyethylene (CPE) core inhibits sound, offering exceptional noise control. It is listed with Underwriters Laboratory UL 181 and complies with NFPA standard 90A and 90B. A highly efficient, self-extinguishing duct, TechPure is designed specifically for use in all pressure heating and cooling systems and is backed by a 10-year warranty.

Performance Data:


- **Anti-Microbial**
Resists mold and mildew for improved air quality
- **10-Year Warranty**
Industries best flexible duct warranty
- **Stronger**
Higher positive and negative pressure ratings
- **Acoustical Rated Core**
Offers superior sound control and quieter performance (to make your system quieter).
- **GreenGuard® Children and Schools Certified**
The industry's most recognized Indoor Air Quality (IAQ) ratings
- **Made with 99% Natural Materials***
Highest recycled content - the only fiberglass insulation listed in the USDA BioPreferred Catalog.
-  **LEED**
may contribute to points or certification.

www.toptechparts.com
for warranty information

*Unfaced insulation with a minimum of 99% by weight natural materials.



©2012 The color PINK is a registered trademark of Owens Corning. All trademarks are the property of their respective owners.

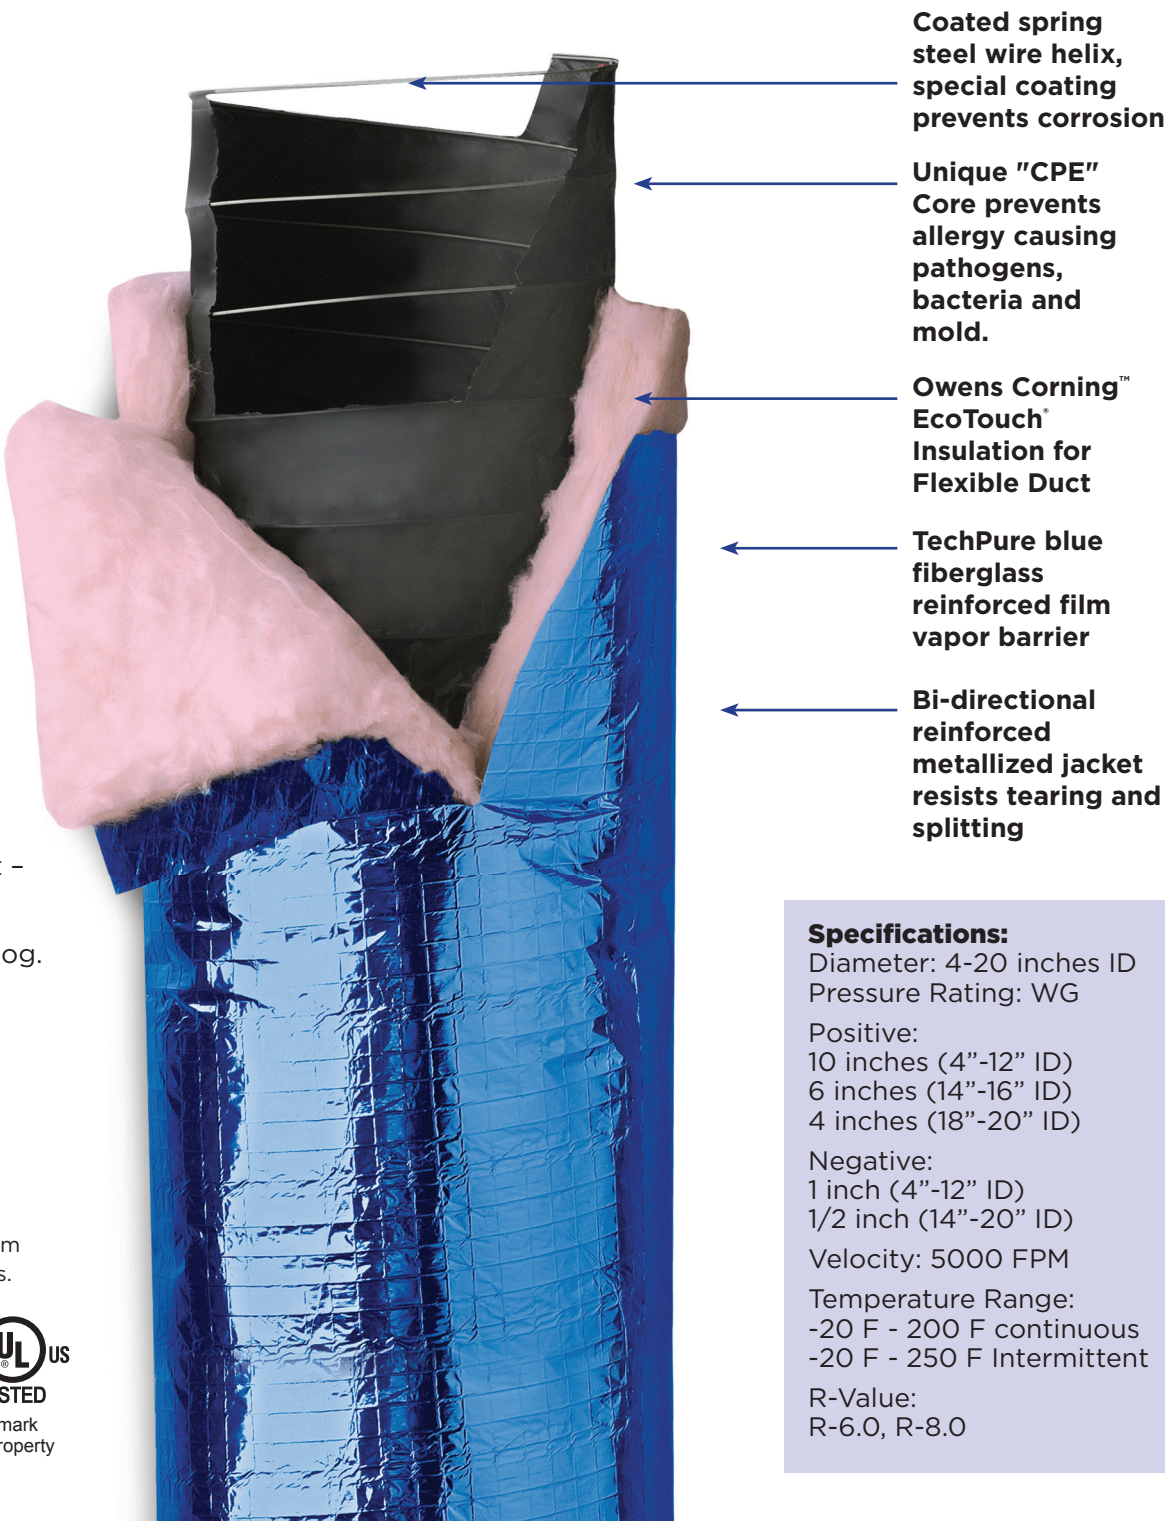

Specifications:

Diameter: 4-20 inches ID
Pressure Rating: WG

Positive:

10 inches (4"-12" ID)
6 inches (14"-16" ID)
4 inches (18"-20" ID)

Negative:

1 inch (4"-12" ID)
1/2 inch (14"-20" ID)

Velocity: 5000 FPM

Temperature Range:

-20 F - 200 F continuous
-20 F - 250 F Intermittent

R-Value:

R-6.0, R-8.0