TT-S-855C COMMERCIAL SETUP START GUIDE

TopTech
comfort | excellence

COMMERCIAL OR RESIDENTIAL "YOUR CHOICE"
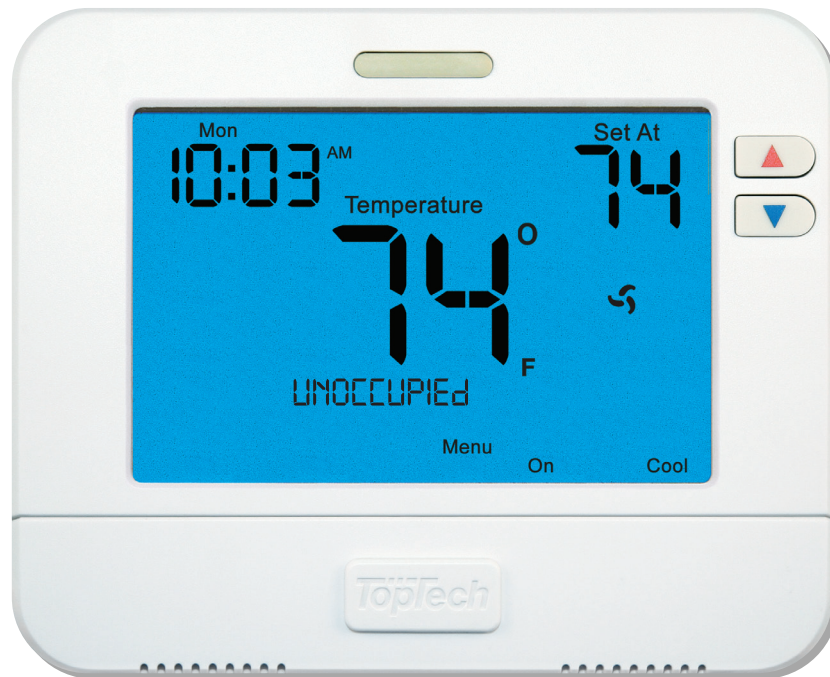
Your TT-S-855C can be configured as a light Commercial Thermostat with these simple steps in Tech Setup.

1 **Program Options** allow you to choose a 7 day or 5+1+1 day program based on the scheduled occupancy of the building each week. (See page 2)

2 The **Time Periods** options in Tech Setup allows you to select two time periods for Occupied and Unoccupied, which is a Commercial Design. The FACTORY DEFAULT is 4 time settings which uses residential language in the display.

3 The **Keypad Lockout** option allows you to choose a partial or full lockout of the thermostat's function keys. We recommended to use at least a partial lockout to prevent tampering in commercial applications.   (See page 2)

Please refer to the Installation Manual for more information.

TopTech by Pro1
For General Customer Support Call Toll-free: 1-866-239-4440
For Technical Support Call Toll-free: 1-888-776-1427
Toll Number (Outside the USA): 330-821-3600
Web: http://www.toptechparts.com
Hours of Operation: Monday - Friday 9 AM - 6 PM Eastern

Rev. 1204   **1**

Technician Setup Menu

This thermostat can be configured for light commercial applications by making these three adjustments in Tech Settings. To access Tech settings simply:
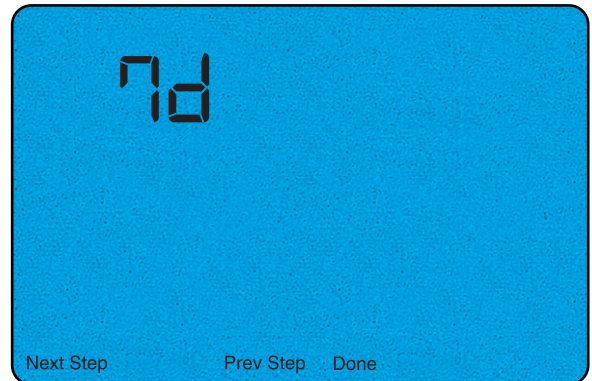
1. Press MENU button

1 **Program Options** allow you to choose a 7 day or 5+1+1 day program based on the scheduled occupancy of the building each week. If the building is always occupied the thermostat should be put into nonprogrammable mode and step two should ignored.

Use the + or − key select 7d for 7day, 5d for 5+1+1, or 0d for nonprogrammable.

2 The **Time Periods** option in Tech Setup allows you to select 2 or 4 time periods per day. The 2 time period option allows for an occupied and unoccupied period for commercial applications.
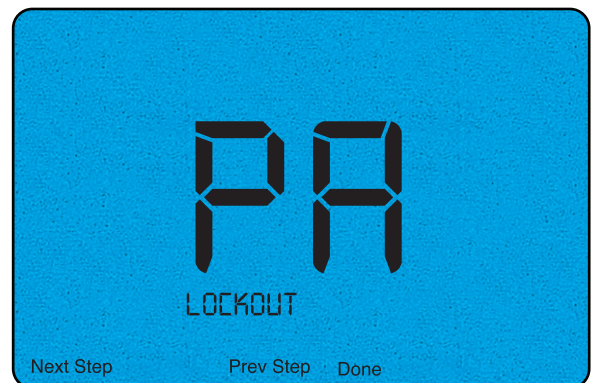
Use the + or − key to select 2 or 4 time periods per day.
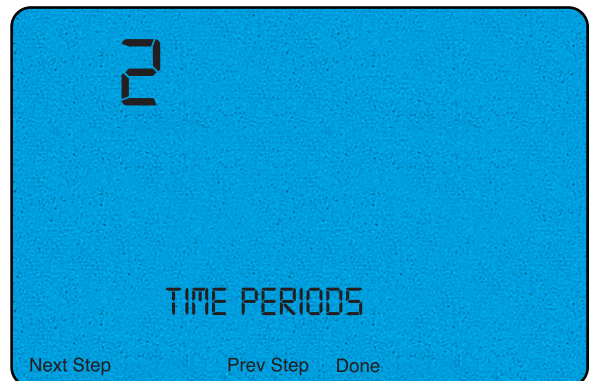
This step is Mandatory for Commercial Setup

3 **Keypad Lockout** allows you to choose a partial or full lockout of the thermostat's function keys. We recommended to use at least a partial lockout to prevent tampering in commercial applications.

Pick PA for partial and FU for full. A partial lockout will lock all keys except the + or − keys. A full lockout will lock out all the keys.

2. Press and hold TECHNICIAN SETUP button for 3 seconds.

3. Use the + or − keys to change settings and the NEXT STEP or PREV STEP key to move from one options to another.

7d

Next Step   Prev Step   Done

2

TIME PERIODS

Next Step   Prev Step   Done

PA

LOCKOUT

Next Step   Prev Step   Done

Note: To lock the keypad hold down the + and − keys for 3 seconds. You will see a lock in the display. To unlock the keypad hold down the + and − keys for 3 seconds.

Please refer to the Installation Manual for more information.